



LITE Prem 150
DATASHEET

Service . Range . Knowledge

LITE Prem 150

The Lite Prem 150 is a highly versatile drainage system known for its exceptional durability, flexibility, and lightweight design, making it ideal for applications requiring A15 load capacity. This innovative system features a fully attachable edge rail that can be seamlessly integrated into the channel, providing enhanced strength and durability for a wide range of environments.



DATA SHEET

Gratings




Composite Slotted Black (A15)



Composite Slotted Black + Stainless Steel Edge Rail (A15)

* The Lite Prem channel, without the edge rail, supports load classes from A15 to C250, depending on the grating used.
 ** The channel itself can handle up to F900, but to achieve any load class from C250 to F900, the channel must be equipped with the optional edge rail for enhanced performance and strength.

Lite Prem 150 - Diagram

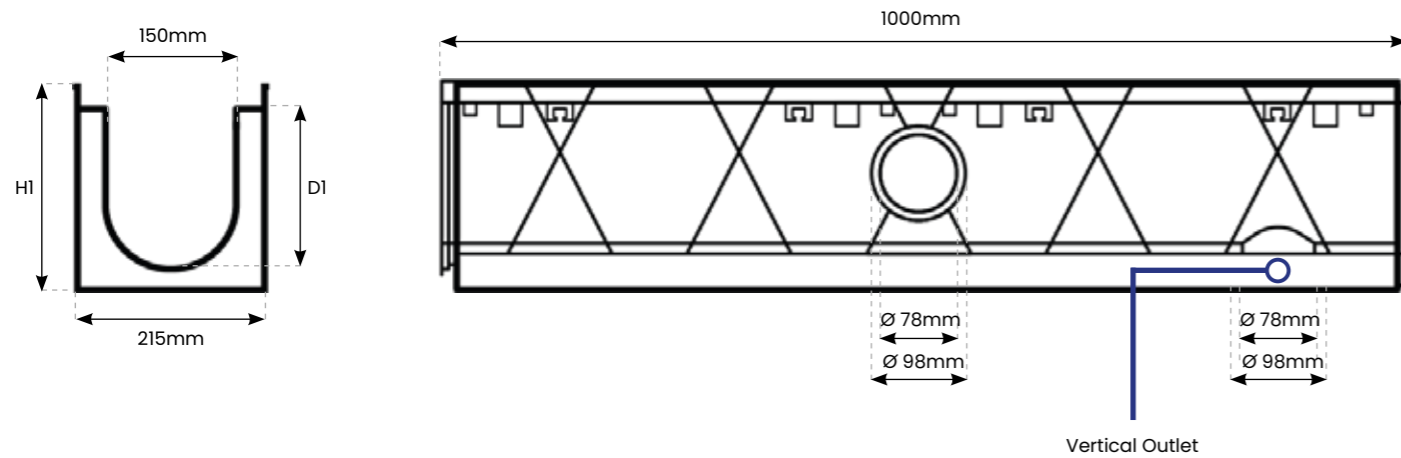

Accessories



Stainless Steel Edge Rail



Bolt & Bar



Side Clamp



End Cap Outlet



Composite Corner Unit

Lite Prem 150 - Specifications

Reference	Description	Overall Depth (H1)	Internal Depth (D1)	Overall Width	Internal Width	Length	Vertical Outlet	Load Class
LP.150.CSB	Lite Prem 150 Composite Slotted Black Grating	195mm	170mm	215mm	150mm	1000mm	78/98mm	A15
LP.150.CSB.ER	Lite Prem 150 + Edge Rail Composite Slotted Black Grating	195mm	170mm	225mm	150mm	1000mm	78/98mm	A15

Accessories - Specifications

Reference	Description	Height	Overall Width	Length	Outlet
CU.LP.150	Lite Prem 150 Corner Unit	195mm	245mm	245mm	-
ECO.LP.150	Lite Prem 150 End Cap Outlet	183mm	215mm	28mm	75/95mm
LP.150.CSBG	Lite Prem 150 Composite Slotted Black Grating	19mm	200mm	500mm	-



Polycon Surface Water Drainage

**Widnes Business Park
Foundry Lane
Widnes
Cheshire
WA8 8UB**

**www.polycon.co.uk
0151 422 9747
sales@polycon.co.uk**

Service . Range . Knowledge