



polycon
surface water drainage

8LOX 100

Service . Range . Knowledge

Welcome To Polycon

Polycon is identified as one of the leading manufacturers, distributors, and suppliers of channel drainage in the UK. We focus towards creating a diverse range of water solutions, in a variety of different materials, including composite, polymer concrete, SMC, and steel.

Polycon's unique look at the market and expert knowledge of the industry ensures that we can supply a wide range of high-quality products suitable for any application. This includes building drainage, landscaping, sports facilities, distribution centres, highways, and airports.

Our design team provides innovative and efficient hydraulic solutions to ensure we can offer the best product/ solution for your drainage needs. We have a vast and experienced overview of our working industry and have been manufacturing, distributing, and selling channel drainage for over 8 years. We thrive on acting upon your feedback to improve and develop our products to fit flawlessly with the constantly changing market and demand from our customers.

At Polycon we focus our attention on professionals who sit within the construction industry, targeting our products to specifiers, architects, engineers, and contractors. Therefore, we understand the importance of expanding our product portfolio to create the most efficient surface water drainage systems.

We are a dynamic and evolving company with a focus on quality, innovation, and service. As a result, you can rely on us to handle your project needs in every way to the best of our ability.

Contents

<i>8LOX 100 Galvanised Edge Rail</i>	<i>3</i>
<i>8LOX 100 D400 Overview</i>	<i>5</i>
<i>Accessories</i>	<i>7</i>
<i>Depths Options</i>	<i>8</i>
<i>8LOX 100 Paveslot</i>	<i>9</i>
<i>8LOX 100 Ductile Iron Edge Rail</i>	<i>11</i>
<i>8LOX 100 F900 Overview</i>	<i>13</i>
<i>Accessories</i>	<i>15</i>
<i>Depths Options</i>	<i>16</i>

Service • Range • Knowledge


8LOX 100 – Galvanised Edge Rail

The 8LOX drainage channel, a revolutionary system that promises to redefine the way we manage water in urban and commercial environments. With a cutting-edge design, polymer concrete base, ductile iron gratings, with a galvanised edge rail, the 8LOX represents the pinnacle of engineering excellence in drainage technology. Throughout this brochure, we'll explore the key features and benefits of the 8LOX drainage channel, demonstrating how it sets a new standard for drainage solutions.

Its innovative eight-point locking mechanism is at the heart of the 8LOX drainage channel. This ingenious design ensures that the grating securely locks into place, providing unmatched stability and preventing unauthorized access or tampering.

The 8LOX drainage channel is engineered for exceptional stability, even in the most demanding conditions. The polymer concrete base provides a robust foundation that can withstand the harshest weather, corrosive substances, and heavy traffic loads without compromising its structural integrity. Furthermore, the galvanised edge rail adds an extra layer of strength and protection against rust, and corrosion, ensuring that the system remains reliable.

One of the standout advantages of the 8LOX drainage channel is the straightforward, hassle-free installation process. This system can be assembled quickly and effortlessly thanks to its modular design. Whether you're a seasoned contractor or a first-time user, you'll appreciate the simplicity of installation, which saves time and labour costs.

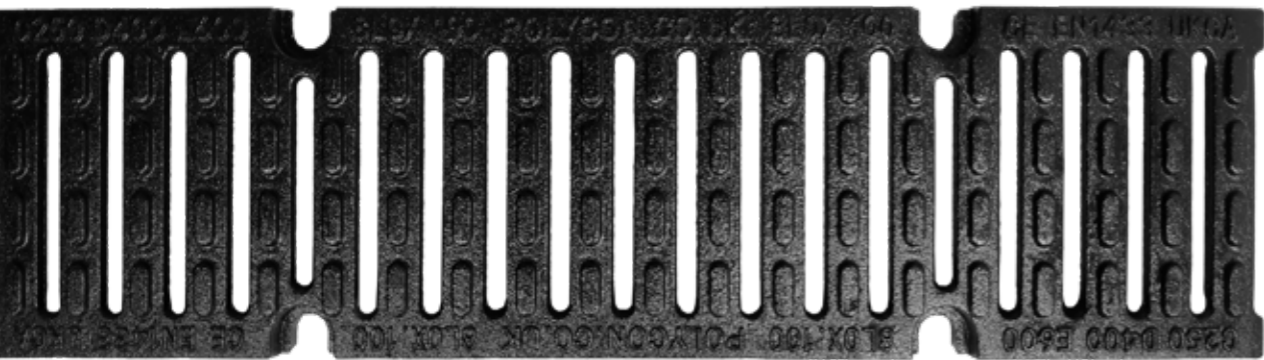

Load Class



1.5t

A15
1.5 tonnes



12.5t

B125
12.5 tonnes



25t

C250
25 tonnes



40t

D400
40 tonnes

Applications

- Driveways
- Pedestrian areas
- Car parks
- Farms
- Commercial & civil areas

8LOX 100



8LOX 100 D400 – Overview

Colour Options

Sand




8-Point Locking

The eight-point locking system not only enhances the channel's durability but also contributes to its exceptional load-bearing capacity, making it a suitable system for a wide range of applications, from urban to commercial areas.

Material

The 8LOX is constructed from polymer concrete and therefore possesses exceptional benefits, including its superior quality and resilience and its resistance to the corrosive effects of various chemicals. Another stand-out feature of polymer concrete is its smooth surface. This material ensures efficient water flow, preventing clogs and minimising the need for excessive maintenance.

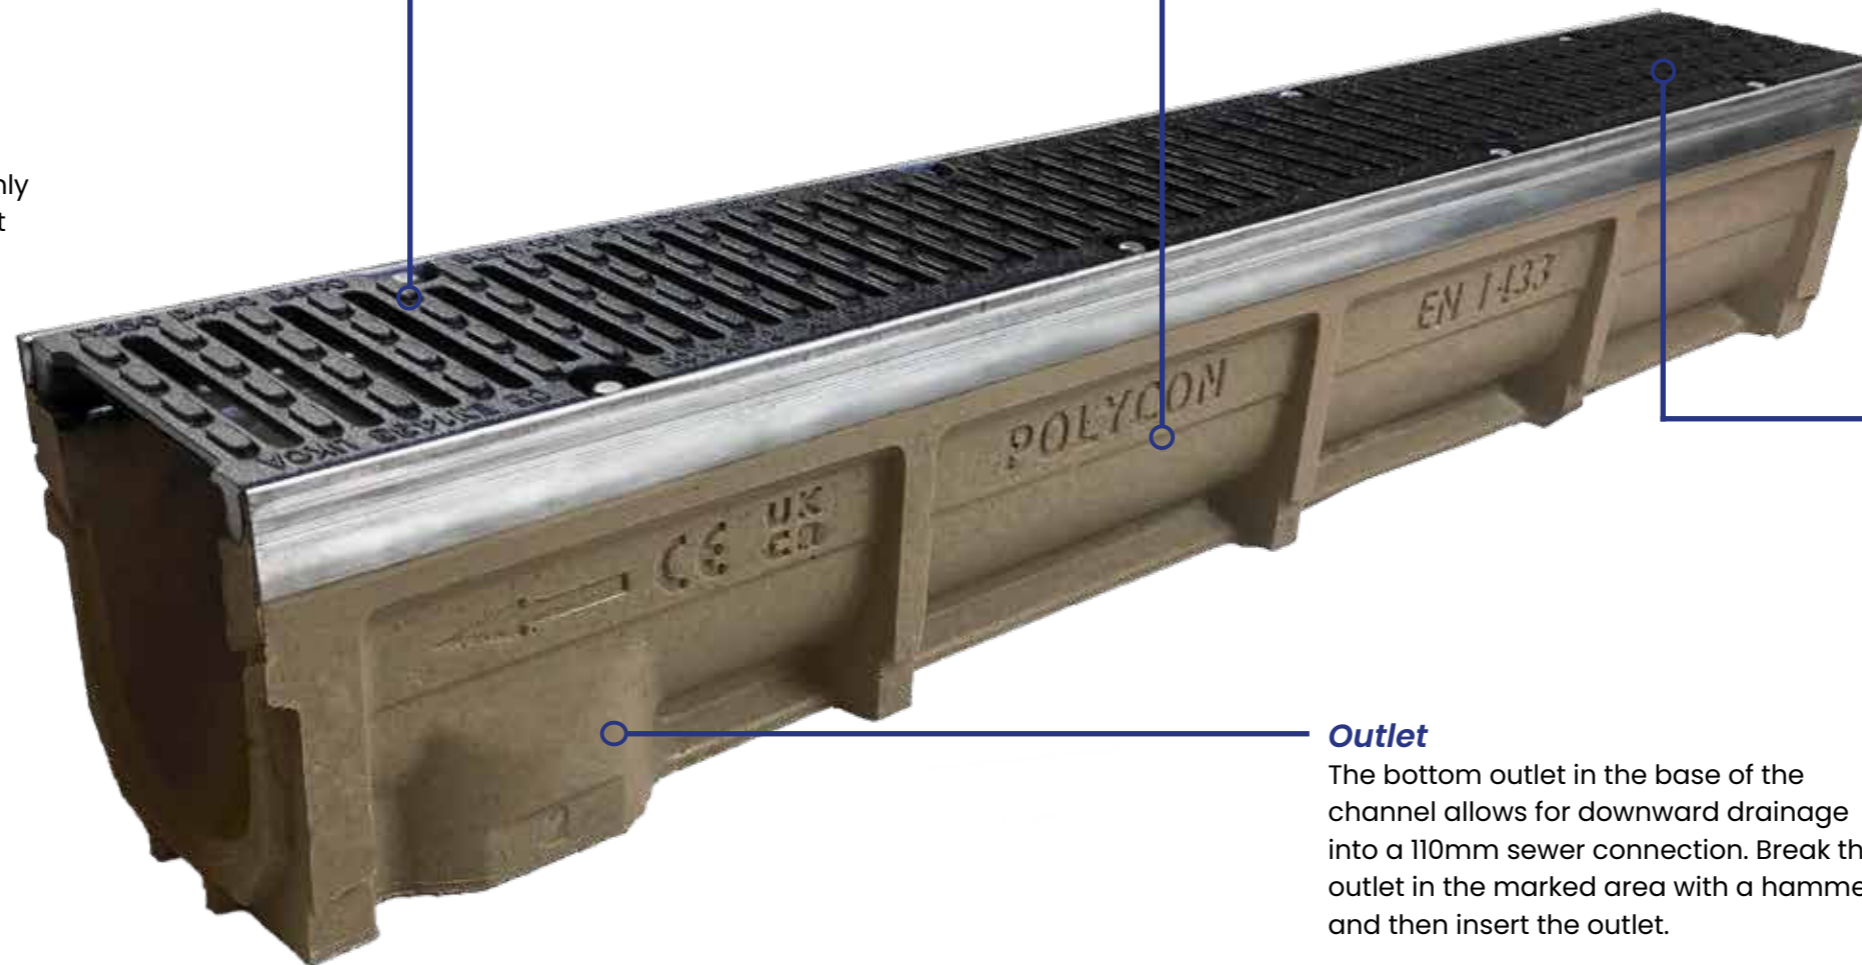

SAFEHEEL

Outlet

The bottom outlet in the base of the channel allows for downward drainage into a 110mm sewer connection. Break the outlet in the marked area with a hammer and then insert the outlet.

Load Classes




1.5t

A15



12.5t

B125



25t

C250



40t

D400

Depth Options



80mm



100mm



140mm



165mm



190mm




240mm



290mm

8LOX 100 – Galvanised Edge Rail

The 8LOX drainage channel has an eight-point locking mechanism that allows for a user-friendly installation process with unmatched stability. This system offers a superior solution for managing water in urban and commercial settings. Whether you're looking to enhance safety and security or seeking a durable drainage system for your project, the 8LOX is the choice that delivers both innovation and reliability.

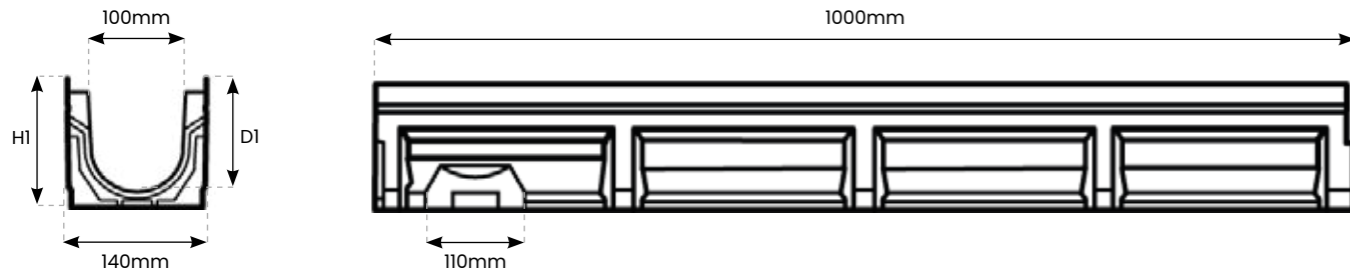

Accessories



End Cap
Front/Back

End Caps can be used at the end of your channel run to stop the flow of water.



End Cap Outlet

An End Cap Outlet can be used at the end of the run to allow water to be taken to your exterior drainage pipes and away from the channel.



Green Drain
Foul Air Trap

Green Drain Foul Air Trap fits into the pipe connector, forming a barrier that stops foul air and unpleasant odours from escaping.




Sump Unit

A Sump Unit can be used as an access point to the channel, allowing for any maintenance checks. However, it also acts as a reservoir, temporarily storing excess water before discharging it in a controlled manner to prevent adverse effects of water accumulation.

Depth Options

8LOX 100 Galvanised Edge Rail – Specifications

Reference	Description	Pallet Quantity	Length	Internal Width	Overall Width	Overall Depth(HI)	Internal Depth(D1)	Load Class	Safe Heel
8L.100.80.GER	8LOX 100.80 – Galvanised Edge Rail	72	1000mm	100mm	140mm	80mm	60mm	A/B/C/D	Yes
8L.100.100.GER	8LOX 100.100 – Galvanised Edge Rail	64	1000mm	100mm	140mm	100mm	80mm	A/B/C/D	Yes
8L.100.140.GER	8LOX 100.140 – Galvanised Edge Rail	60	1000mm	100mm	140mm	140mm	120mm	A/B/C/D	Yes
8L.100.165.GER	8LOX 100.165 – Galvanised Edge Rail	56	1000mm	100mm	140mm	165mm	145mm	A/B/C/D	Yes
8L.100.190.GER	8LOX 100.190 – Galvanised Edge Rail	40	1000mm	100mm	140mm	190mm	170mm	A/B/C/D	Yes
8L.100.240.GER	8LOX 100.240 – Galvanised Edge Rail	40	1000mm	100mm	140mm	240mm	220mm	A/B/C/D	Yes
8L.100.290.GER	8LOX 100.290 – Galvanised Edge Rail	32	1000mm	100mm	140mm	290mm	270mm	A/B/C/D	Yes

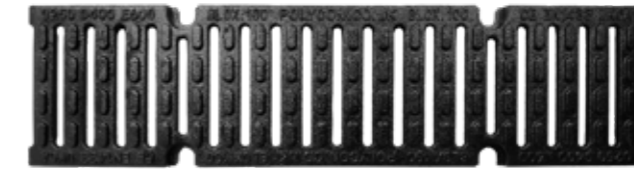

Ductile Iron Grating
(D400)

Grating – Specification

Reference	Description	Length	Height (H)	Overall Width
8L.100.DIG.D400	8LOX 100 Ductile Iron Grating D400	1000mm	30mm	130mm


Accessories – Specifications

Reference	Description	Length	Height (H)	Overall Width	Weight (KG)	Outlet
8L.100.SU.GER	8LOX 100 Sump Unit Galvanised Edge Rail	500mm	600mm	140mm	39.5kg	110mm
8L.100.80.ECO.GER	8LOX 100.80 End Cap Outlet Galvanised Edge Rail	30mm	80mm	140mm	-	50mm
8L.100.100.ECO.GER	8LOX 100.100 End Cap Outlet Galvanised Edge Rail	30mm	100mm	140mm	-	50mm
8L.100.140.ECO.GER	8LOX 100.140 End Cap Outlet Galvanised Edge Rail	30mm	140mm	140mm	-	110mm
8L.100.165.ECO.GER	8LOX 100.165 End Cap Outlet Galvanised Edge Rail	30mm	165mm	140mm	-	110mm
8L.100.190.ECO.GER	8LOX 100.190 End Cap Outlet Galvanised Edge Rail	30mm	190mm	140mm	-	110mm
8L.100.240.ECO.GER	8LOX 100.240 End Cap Outlet Galvanised Edge Rail	30mm	240mm	140mm	-	110mm
8L.100.290.ECO.GER	8LOX 100.290 End Cap Outlet Galvanised Edge Rail	30mm	290mm	140mm	-	110mm
8L.100.80.EC.GER	8LOX 100.80 End Cap Galvanised Edge Rail	30mm	80mm	140mm	-	-
8L.100.100.EC.GER	8LOX 100.100 End Cap Galvanised Edge Rail	30mm	100mm	140mm	-	-
8L.100.140.EC.GER	8LOX 100.140 End Cap Galvanised Edge Rail	30mm	140mm	140mm	-	-
8L.100.165.EC.GER	8LOX 100.165 End Cap Galvanised Edge Rail	30mm	165mm	140mm	-	-
8L.100.190.EC.GER	8LOX 100.190 End Cap Galvanised Edge Rail	30mm	190mm	140mm	-	-
8L.100.240.EC.GER	8LOX 100.240 End Cap Galvanised Edge Rail	30mm	240mm	140mm	-	-
8L.100.290.EC.GER	8LOX 100.290 End Cap Galvanised Edge Rail	30mm	290mm	140mm	-	-

8LOX 100 – Offset Paveslot


8LOX Offset Paveslot is specifically designed for integration into high-quality natural stone and paving surfaces. The discrete inlet slot enables efficient drainage without compromising the ground design. We offer galvanised and Stainless Steel Paveslot as well as an access tray for cleaning purposes.

View From Above

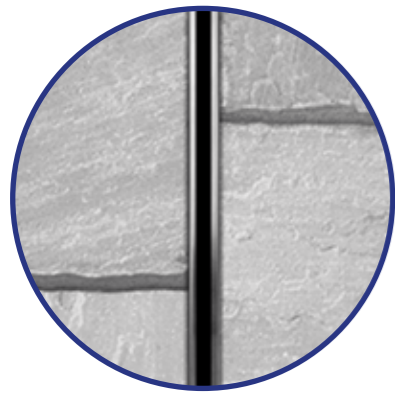

Available In Galvanised and Stainless Steel

Diagram – Offset Paveslot

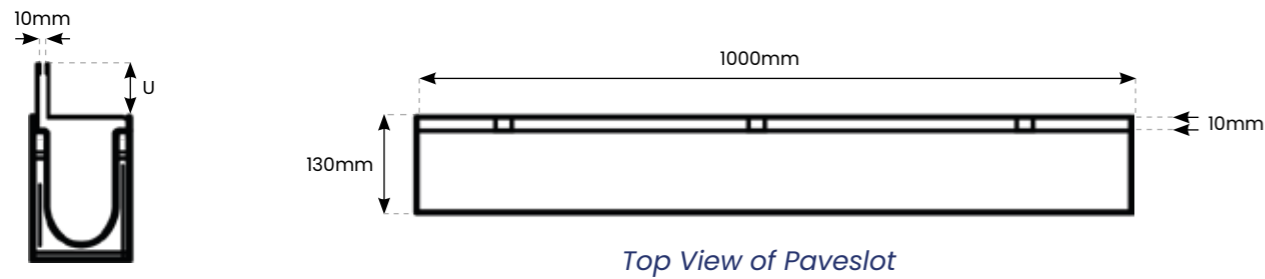

Top View of Paveslot

Offset Paveslot – Specifications

Reference	Description	Length (mm)	Slot Width	Overall Width	Load Class	Upstand (u)
OP.10105.P.G	Galvanised Offset Paveslot 105mm	500/1000	10mm	130mm	C/D	105mm
OP.10105.P.SS	Stainless Steel Offset Paveslot 105mm	500/1000	10mm	130mm	C/D	105mm


8LOX 100 – Access Tray

Access trays are typically used for maintenance and inspection purposes, they are installed at strategic points along the channel, often at intervals where they can be easily reached for cleaning, inspection, or repairs.



Available In Galvanised and Stainless Steel

Diagram – Access Tray

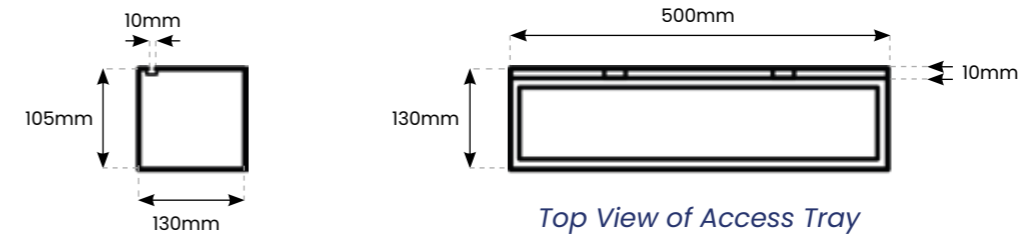

Top View of Access Tray

Access Tray – Specifications


Reference	Description	Length	Height (H)	Overall Width	Slot Width	Weight (KG)	Outlet
8LOX.100.AT.G	8LOX 100 Access Tray – Galvanised	500mm	105mm	130mm	10mm	6.5kg	-
8LOX.100.AT.SS	8LOX 100 Access Tray – Stainless Steel	500mm	105mm	130mm	10mm	6.5kg	-

8LOX 100 – Ductile Iron Edge Rail


The 8LOX drainage channel is a groundbreaking system which features a polymer concrete base, ductile iron gratings, and a ductile iron edge rail, setting a new standard in drainage technology. At the core of the 8LOX drainage channel is its robust polymer concrete base, complemented by ductile iron gratings and a ductile iron edge rail. This construction blend ensures a drainage system that can withstand the most challenging conditions. The polymer concrete base endows the channel with exceptional resilience against chemical corrosion and physical wear and tear. Meanwhile, the ductile iron gratings and edge rail reinforce the channel's structure, making it capable of withstanding heavy loads and maintaining its integrity over time.

A standout feature of the 8LOX drainage channel is its innovative eight-point locking mechanism. This design not only ensures the secure and stable placement of the gratings but also provides an unparalleled level of security.

Exceptional stability is just one of the benefits of the 8LOX drainage channel. Thanks to its durable construction, this system can withstand harsh weather conditions, corrosive substances, and heavy traffic loads without compromising its structural integrity.

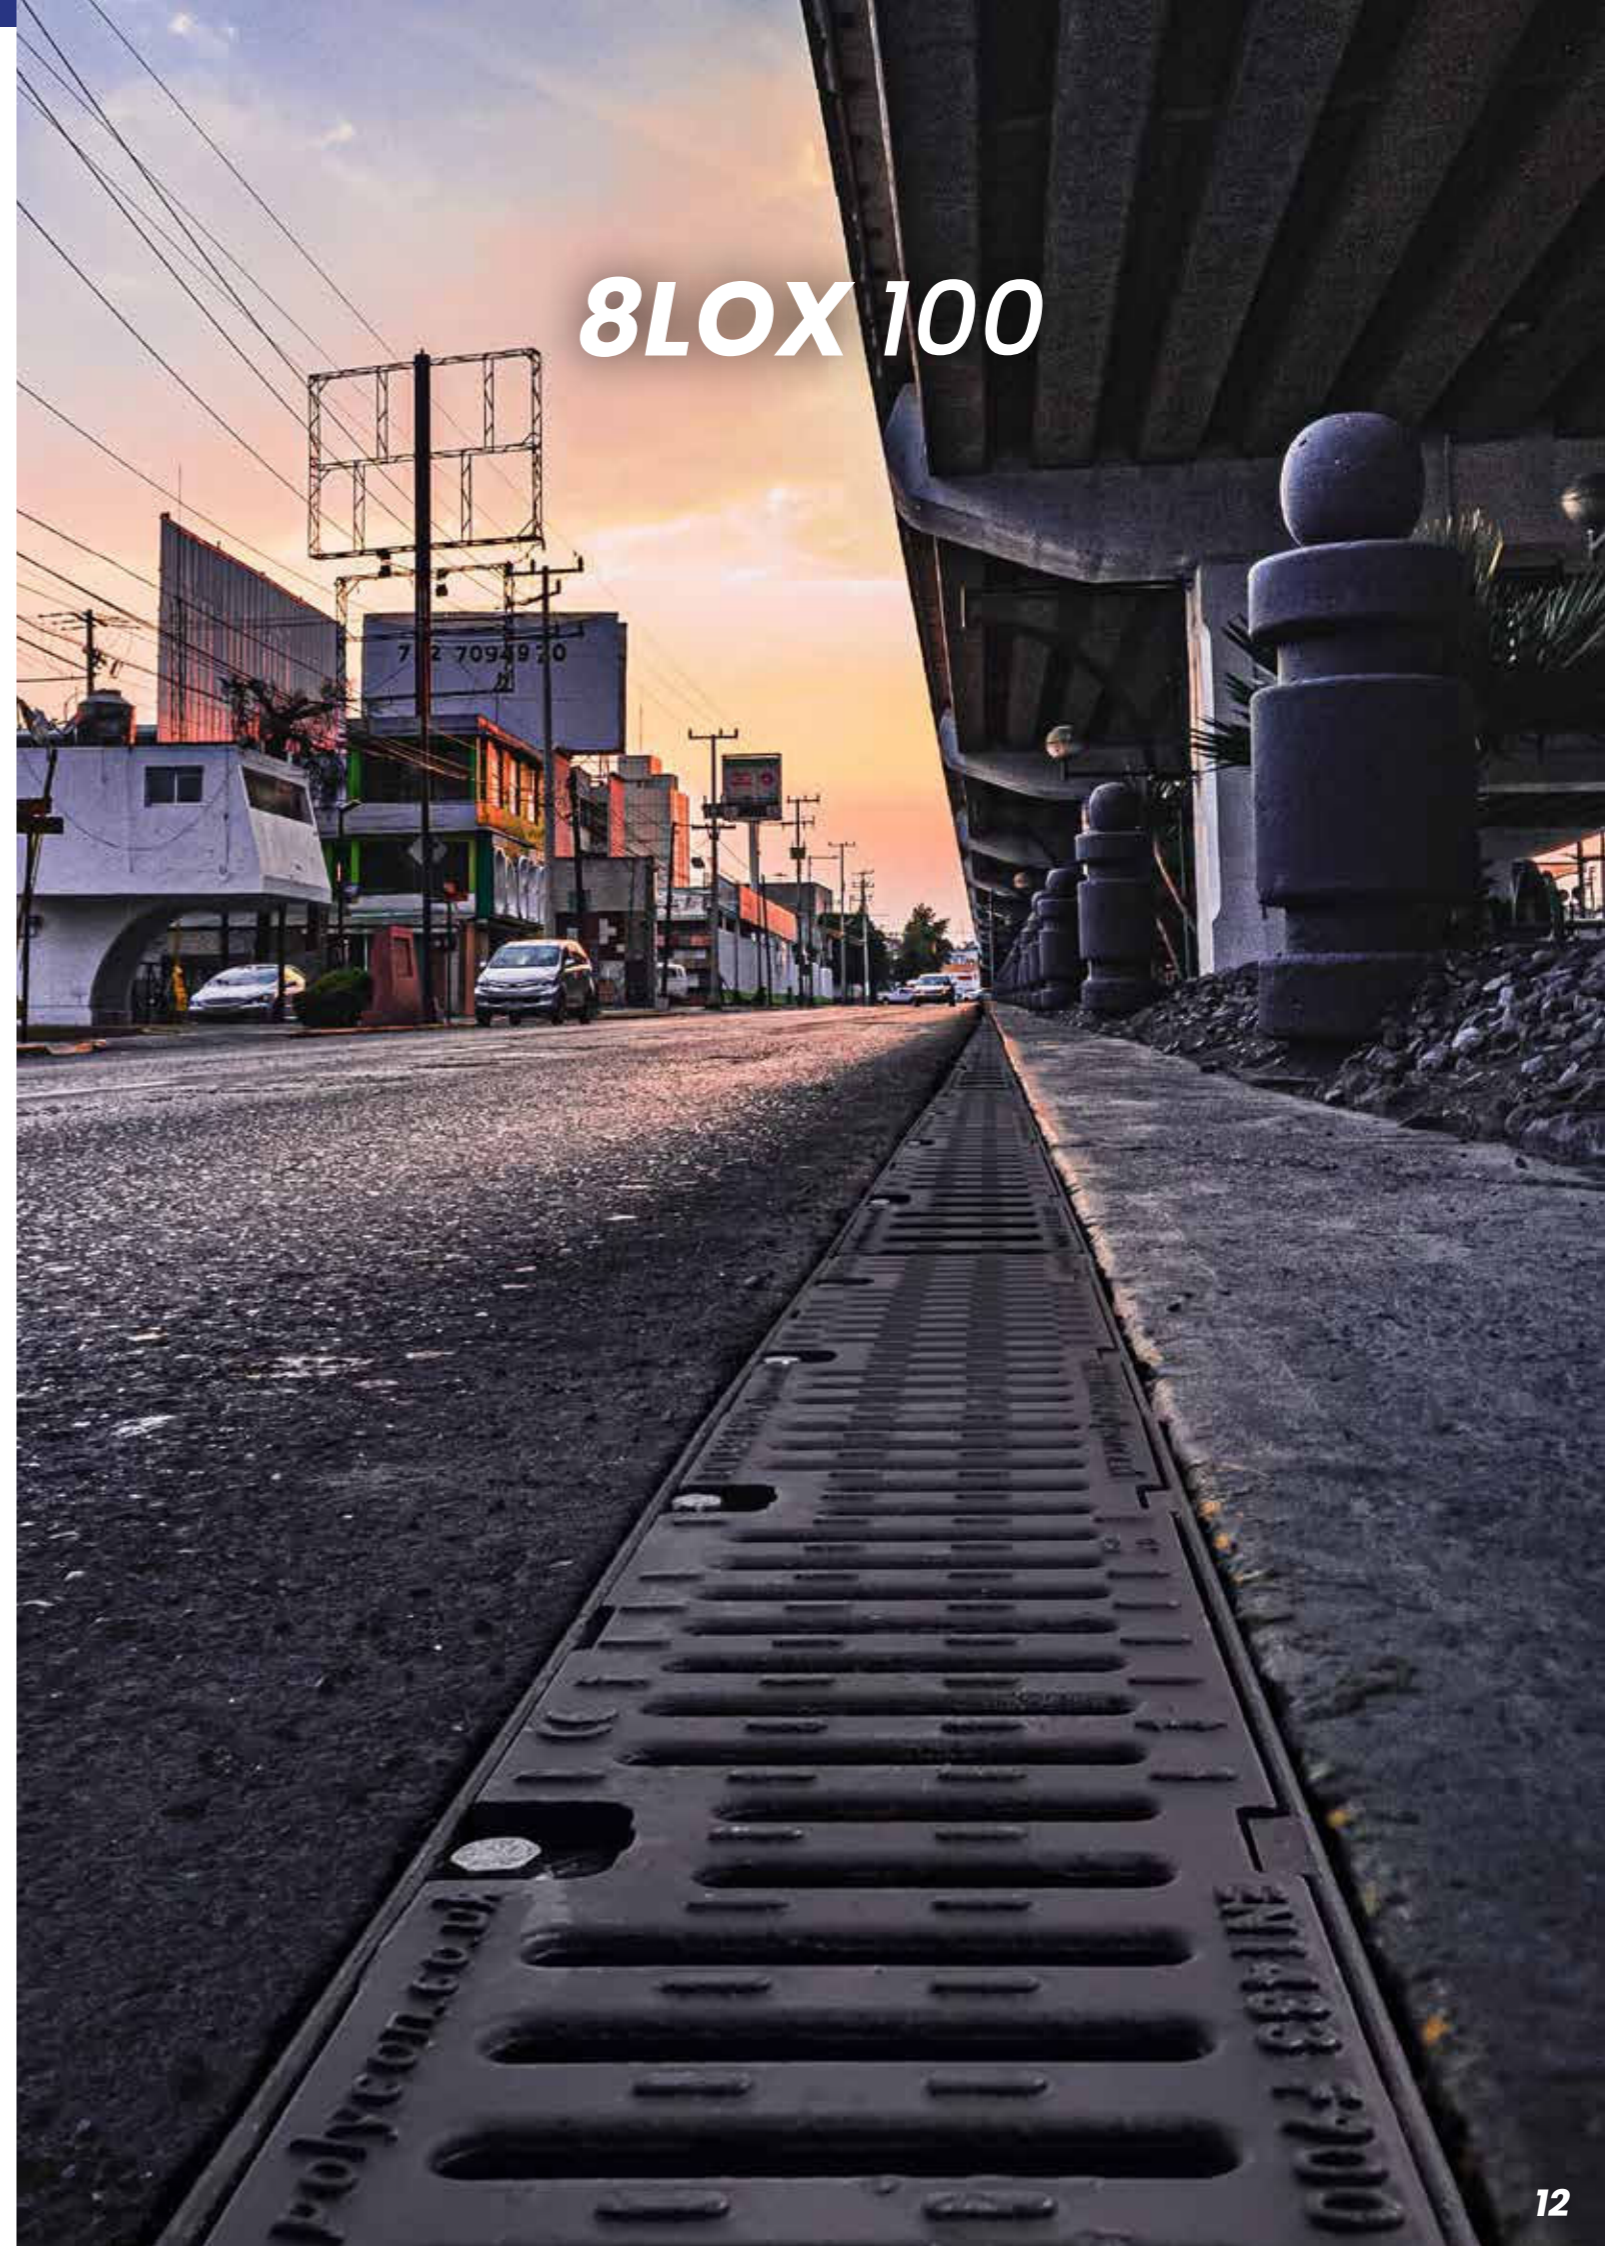

Load Class

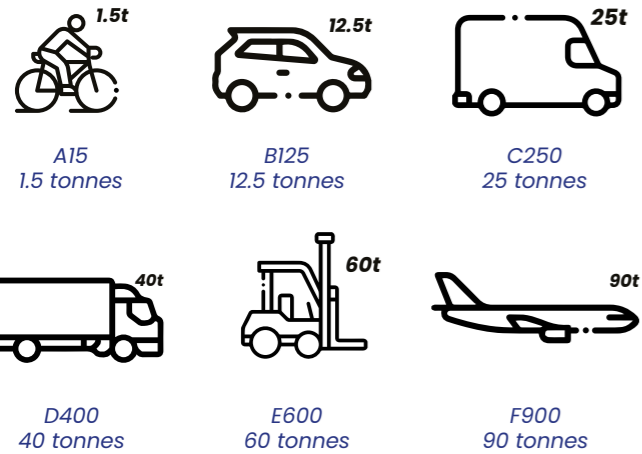

Applications

- Civil yards
- Warehouses
- Farms
- Commercial & civil areas
- Docks & yards

8LOX 100 F900 – Overview



8-Point Locking

The eight-point locking system not only enhances the channel's durability but also contributes to its exceptional load-bearing capacity, making it a suitable system for a wide range of applications, from pedestrian areas to heavy industrial zones.

Material

The 8LOX is constructed from polymer concrete and therefore possesses exceptional benefits, including its superior quality and resilience and its resistance to the corrosive effects of various chemicals. Another stand-out feature of polymer concrete is its smooth surface. This material ensures efficient water flow, preventing clogs and minimising the need for excessive maintenance.

Colour Options




SAFEHEEL


Edge Rail

The incorporation of a ductile iron edge rail in the 8LOX channel exemplifies its commitment to durability and longevity. This edge rail not only enhances the system's load-bearing capacity but also ensures its long-term performance, even in the harshest of environments. Furthermore, the ductile iron edge rail contributes to the 8LOX's visual appeal by maintaining its integrity and appearance over time.

Load Classes

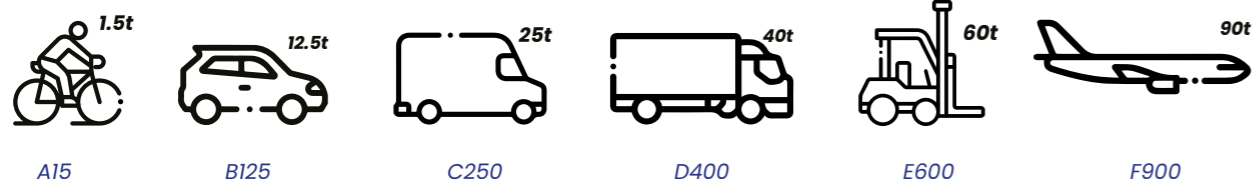


Depth Options

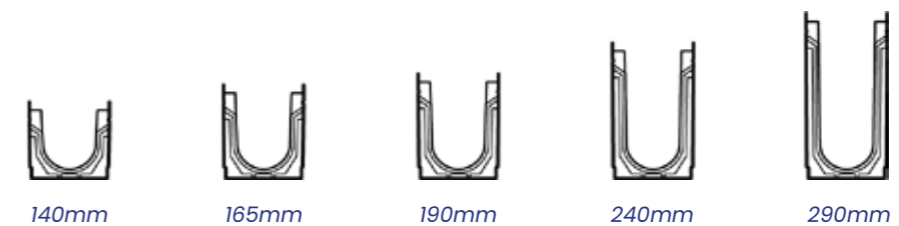

8LOX 100 – Ductile Iron Edge Rail

The 8LOX drainage channel is a game-changer in the world of drainage solutions. Its innovative design combined with its polymer concrete with ductile iron components, offers unparalleled durability and resilience. The eight-point locking mechanism, easy-installation, and exceptional stability make it a standout choice for a wide array of applications, from pedestrian zones to industrial facilities.

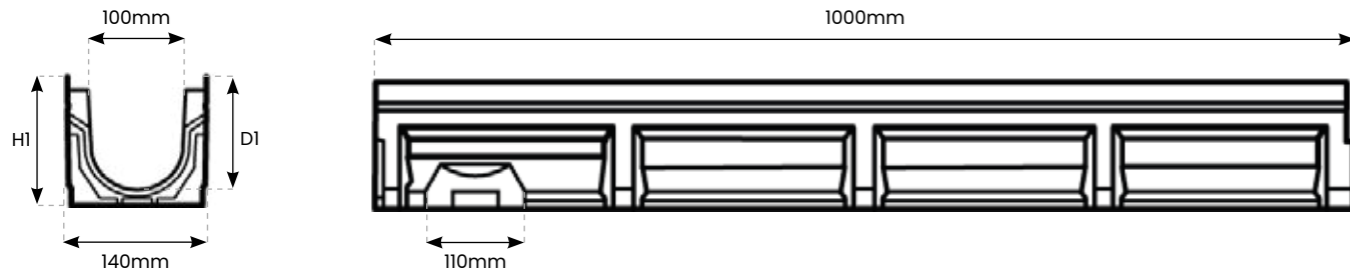

Accessories



End Cap
Front/Back

End Caps can be used at the end of your channel run to stop the flow of water.



End Cap Outlet

An End Cap Outlet can be used at the end of the run to allow water to be taken to your exterior drainage pipes and away from the channel.



Green Drain
Foul Air Trap

Green Drain Foul Air Trap fits into the pipe connector, forming a barrier that stops foul air and unpleasant odours from escaping.



Sump Unit

A Sump Unit can be used as an access point to the channel, allowing for any maintenance checks. However, it also acts as a reservoir, temporarily storing excess water before discharging it in a controlled manner to prevent adverse effects of water accumulation.

Depth Options

8LOX 100 Ductile Iron Edge Rail – Specifications

Reference	Description	Pallet Quantity	Length	Internal Width	Overall Width	Overall Depth(HI)	Internal Depth(DI)	Load Class	Safe Heel
8L.100.140.DIER	8LOX 100.140 – Ductile Iron Edge Rail	60	1000mm	100mm	140mm	140mm	120mm	A/B/C/D/E/F	Yes
8L.100.165.DIER	8LOX 100.165 – Ductile Iron Edge Rail	56	1000mm	100mm	140mm	165mm	145mm	A/B/C/D/E/F	Yes
8L.100.190.DIER	8LOX 100.190 – Ductile Iron Edge Rail	40	1000mm	100mm	140mm	190mm	170mm	A/B/C/D/E/F	Yes
8L.100.240.DIER	8LOX 100.240 – Ductile Iron Edge Rail	40	1000mm	100mm	140mm	240mm	220mm	A/B/C/D/E/F	Yes
8L.100.290.DIER	8LOX 100.290 – Ductile Iron Edge Rail	32	1000mm	100mm	140mm	290mm	270mm	A/B/C/D/E/F	Yes



Ductile Iron Grating
(F900)

Grating – Specification

Reference	Description	Length	Height (H)	Overall Width
8L.100.DIG.F900	8LOX 100 Ductile Iron Grating F900	1000mm	30mm	130mm

Accessories- Specifications

Reference	Description	Length	Height (H)	Overall Width	Weight (KG)	Outlet
8L.100.SU.DIER	8LOX 100 Sump Unit Ductile Iron Edge Rail	500mm	600mm	140mm	39.5kg	110mm
8L.100.140.ECO.DIER	8LOX 100.140 End Cap Outlet Ductile Iron Edge Rail	30mm	140mm	140mm	-	110mm
8L.100.165.ECO.DIER	8LOX 100.165 End Cap Outlet Ductile Iron Edge Rail	30mm	165mm	140mm	-	110mm
8L.100.190.ECO.DIER	8LOX 100.190 End Cap Outlet Ductile Iron Edge Rail	30mm	190mm	140mm	-	110mm
8L.100.240.ECO.DIER	8LOX 100.240 End Cap Outlet Ductile Iron Edge Rail	30mm	240mm	140mm	-	110mm
8L.100.290.ECO.DIER	8LOX 100.290 End Cap Outlet Ductile Iron Edge Rail	30mm	290mm	140mm	-	110mm
8L.100.140.EC.DIER	8LOX 100.140 End Cap Ductile Iron Edge Rail	30mm	140mm	140mm	-	-
8L.100.165.EC.DIER	8LOX 100.165 End Cap Ductile Iron Edge Rail	30mm	165mm	140mm	-	-
8L.100.190.EC.DIER	8LOX 100.190 End Cap Ductile Iron Edge Rail	30mm	190mm	140mm	-	-
8L.100.240.EC.DIER	8LOX 100.240 End Cap Ductile Iron Edge Rail	30mm	240mm	140mm	-	-
8L.100.290.EC.DIER	8LOX 100.290 End Cap Ductile Iron Edge Rail	30mm	290mm	140mm	-	-



Polycon Surface Water Drainage

**Widnes Business Park
Foundry Lane
Widnes
Cheshire
WA8 8UB**

**www.polycon.co.uk
0151 422 9747
sales@polycon.co.uk**

Service . Range . Knowledge